
Preliminary

Vertex S+ G3

N-type i-TOPCon Ultra

MONOFACIAL DUAL GLASS MODULE

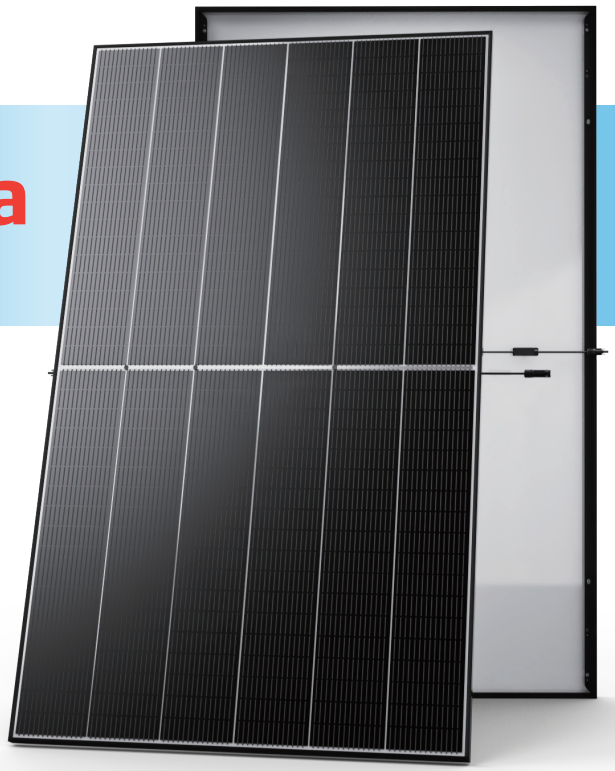

TSM-NEG18R.28Q **510-535W**

535W / MAXIMUM POWER OUTPUT

24.1% / MAXIMUM EFFICIENCY

High customer value

- Lower LCOE (levelized cost of energy), reduced BOS (balance of system) cost, shorter payback time
- Designed for compatibility with existing mainstream system components
- High module power, high string power and low voltage design
- Easy to handle and install on roofs with excellent size and light weight

High power up to 535W

- Up to 24.1% module efficiency , on 210 innovation platform
- Patented i-TOPCon technology with continuous efficiency improvement, including contact resistance reduction, rear reflection enhancement and edge quality repairment


Dual-glass design, high reliability

- Less prone to micro-cracks and scratches on the back side
- Applicable in harsh environments such as salt, ammonia, sand, high temperature and high humidity areas with excellent fire rating, weather resistance, salt spray, sand dust, ammonia performance
- Mechanical performance up to 5400 Pa positive load and 2400 Pa negative load

High energy yield

- Excellent low irradiation performance, validated by 3rd party
- Lower temperature coefficient (-0.26%/°C) and operating temperature

Performance Warranty

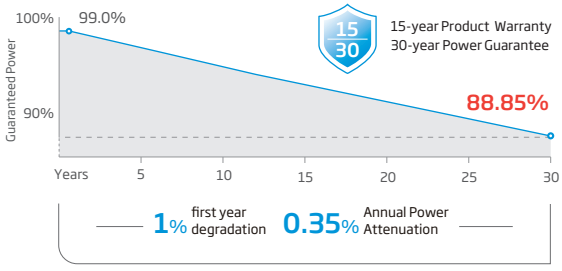

* Please refer to product warranty for details

Comprehensive Products and System Certificates

IEC61215/IEC61730/IEC61701/IEC62716

ISO 9001: Quality Management System

ISO 14001: Environmental Management System

ISO14064: Greenhouse Gases Emissions Verification

ISO45001: Occupational Health and Safety Management System

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.
© 2026 Trina Solar Co.,Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.
The right of final interpretation belongs to Trina Solar Co.,Ltd.

Version number: TSM_EN_2026_PA3

Trinasolar

Vertex S+ G3

N-type i-TOPCon Ultra MONOFACIAL DUAL GLASS MODULE

ELECTRICAL DATA (STC)

Peak Power Watts-PMAX(Wp)*	510	515	520	525	530	535
Power Selection (W)**			0 ~ +5			
Maximum Power Voltage-VMPP (V)	33.70	33.90	34.10	34.30	34.50	34.70
Maximum Power Current-IMPP (A)	15.14	15.20	15.25	15.31	15.36	15.42
Open Circuit Voltage-VOC (V)	40.60	40.90	41.20	41.60	41.80	42.10
Short Circuit Current-ISC (A)	15.93	15.96	15.99	16.02	16.05	16.08
Module Efficiency η m (%)	22.9	23.2	23.4	23.6	23.8	24.1

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5. *Measuring tolerance: ±3%. **Power selection up to: +3%.

ELECTRICAL DATA (NOCT)

Peak Power Watts-PMAX(Wp)	391	395	399	403	407	411
Maximum Power Voltage-VMPP (V)	32.10	32.40	32.60	32.90	33.10	33.40
Maximum Power Current-IMPP (A)	12.17	12.20	12.22	12.24	12.27	12.30
Open Circuit Voltage-VOC (V)	38.70	39.00	39.30	39.60	39.80	40.10
Short Circuit Current-ISC (A)	12.84	12.86	12.89	12.91	12.94	12.96

NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

TEMPERATURE RATINGS

NOCT (Nominal Operating Cell Temperature)	43℃ (±2℃)
Temperature Coefficient of PMAX	- 0.26% /℃
Temperature Coefficient of VOC	- 0.24% /℃
Temperature Coefficient of ISC	0.04% /℃

Due to different testing methods, the actual performances might differ from the declared specifications.


APPLICATION CONDITIONS

Operating Temperature	-40~+70℃
Maximum System Voltage	1500V DC (IEC)
Max Series Fuse Rating	30A


CURVES OF PV MODULE

Preliminary

I-V CURVES OF PV MODULE (520W)

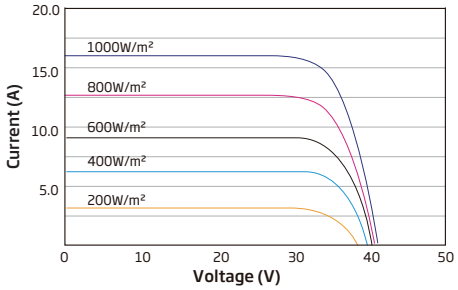


P-V CURVES OF PV MODULE (520W)

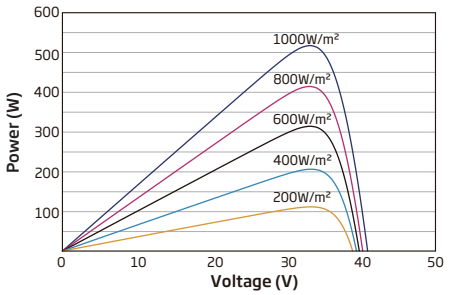

MECHANICAL DATA

Solar Cells	N-type i-TOPCon Monocrystalline
No. of cells	216 cells
Module Dimensions	1961×1134×30 mm (77.20×44.65×1.18 inches)
Weight	23.5 kg (51.8 lb)
Front Glass	1.6mm (0.06inches), AR Coating Heat Strengthened Glass
Back Glass	1.6mm (0.06 inches), Heat Strengthened Glass
Frame	30mm(1.18 inches) Anodized Aluminium Alloy, Black
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm² (0.006 inches²) Landscape: 200/510 mm(7.87/20.08inches) Length can be customized
Connector	TS4 Plus / TS4 / MC4 EVO2 *
Packaging	Modules per box: 36 pieces Modules per 40' container: 864 pieces

*The connector names listed are general names; specific types are subject to the certification documents.

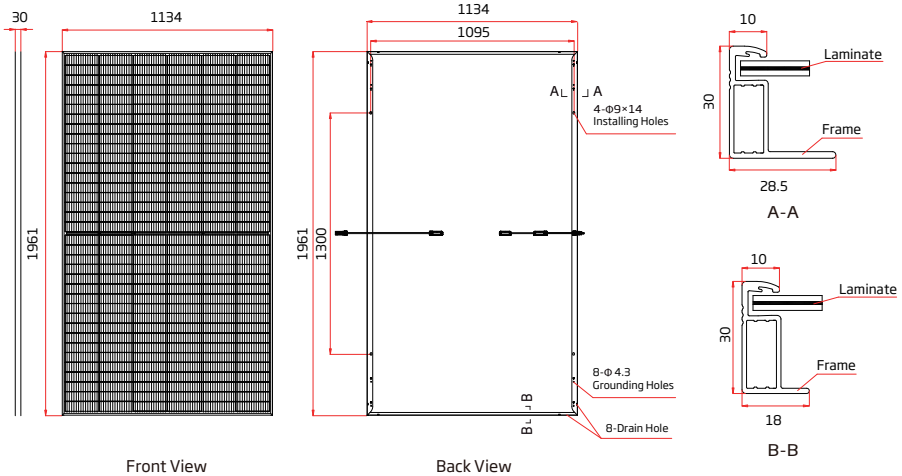

www.trinasolar.com

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.
© 2026 Trina Solar Co.,Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.
The right of final interpretation belongs to Trina Solar Co.,Ltd.

Version number: TSM_EN_2026_PA3

Trinasolar