
Vertex S+

N-type i-TOPCon Ultra

MONOFACIAL DUAL GLASS MODULE

TSM-xxxNEG18R.28 **495-525W**

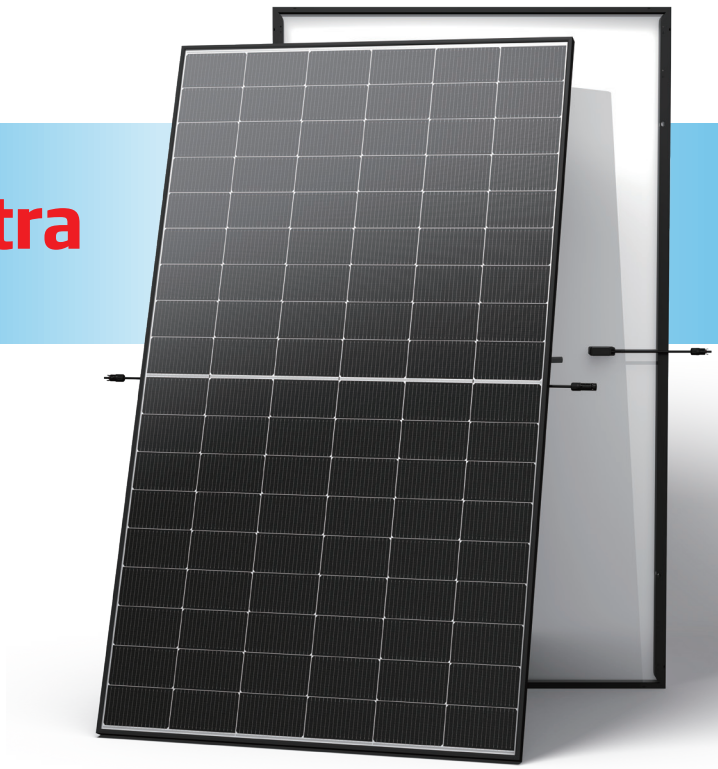

525W / MAXIMUM POWER OUTPUT

23.6% / MAXIMUM EFFICIENCY

High customer value

- Lower LCOE (levelized cost of energy), reduced BOS (balance of system) cost, shorter payback time
- Designed for compatibility with existing mainstream system components
- High module power, high string power and low voltage design
- Easy to handle and install on roofs with excellent size and light weight

High power up to 525W

- Up to 23.6% module efficiency , on 210 innovation platform
- Patented i-TOPCon technology with continuous efficiency improvement, including contact resistance reduction, rear reflection enhancement and edge quality repairment


Dual-glass design, high reliability

- Less prone to micro-cracks and scratches on the back during installation
- Fire class rating C, Safety Class II
- Mechanical performance up to 5400 Pa static test load, Front and 2400 Pa static test load, Back

High energy yield

- Excellent low irradiation performance, validated by 3rd party
- Lower temperature coefficient (-0.29%/°C) and operating temperature

Performance Warranty

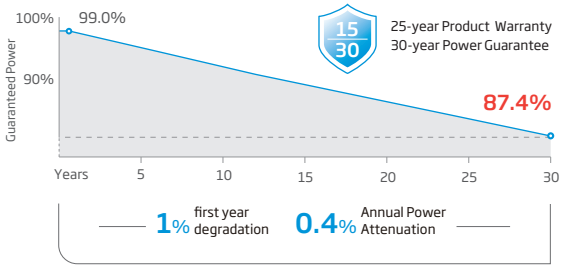

(*Please refer to Limited Warranty Supplement that applies to the TSM-***NEG18R.28. Products installed within Australia & New Zealand market.)

Comprehensive Products and System Certificates

IEC61215/IEC61730
ISO 9001: Quality Management System
ISO 14001: Environmental Management System
ISO14064: Greenhouse Gases Emissions Verification
ISO45001: Occupational Health and Safety Management System

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.
© 2025 Trina Solar Co.,Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.
The right of final interpretation belongs to Trina Solar Co.,Ltd.

Version number: TSM_AUS_EN_2025_D
Country of Origin: China

Trinasolar

Vertex S+

N-type i-TOPCon Ultra MONOFACIAL DUAL GLASS MODULE

ELECTRICAL DATA (STC) TSM-xxxNEG18R.28 (xxx = 495-525)

Peak Power Watts-PMAX(Wp)*	495	500	505	510	515	520	525
Power Selection (W)**				0 ~ +5			
Maximum Power Voltage-VMPP (V)	33.1	33.3	33.5	33.7	33.9	34.1	34.3
Maximum Power Current-IMPP (A)	14.97	15.03	15.09	15.14	15.20	15.25	15.31
Open Circuit Voltage-VOC (V)	39.8	40.1	40.3	40.6	40.9	41.2	41.6
Short Circuit Current-ISC (A)	15.83	15.86	15.89	15.93	15.96	15.99	16.02
Module Efficiency ηm (%)	22.3	22.5	22.7	22.9	23.2	23.4	23.6

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5. *Measuring tolerance: Pmax±3%, Voc±3% and Isc ±4%

ELECTRICAL DATA (NOCT)

Peak Power Watts-PMAX(Wp)	378	382	386	390	394	396	401
Maximum Power Voltage-VMPP (V)	31.3	31.5	31.8	31.9	32.2	32.3	32.7
Maximum Power Current-IMPP (A)	12.08	12.11	12.15	12.21	12.23	12.26	12.27
Open Circuit Voltage-VOC (V)	37.7	38.0	38.3	38.5	38.8	39.0	39.5
Short Circuit Current-ISC (A)	12.76	12.78	12.81	12.84	12.86	12.89	12.91

NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

TEMPERATURE RATINGS


NOCT (Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of PMAX	- 0.29% /°C
Temperature Coefficient of VOC	- 0.24% /°C
Temperature Coefficient of ISC	0.04% /°C


Due to different testing methods, the actual performances might differ from the declared specifications.

APPLICATION CONDITIONS

Operating Temperature	-40~+70°C
Maximum System Voltage	1500V DC (IEC)
Max Series Fuse Rating	30A


CURVES OF PV MODULE (Cell Temperature (25±2)°C)

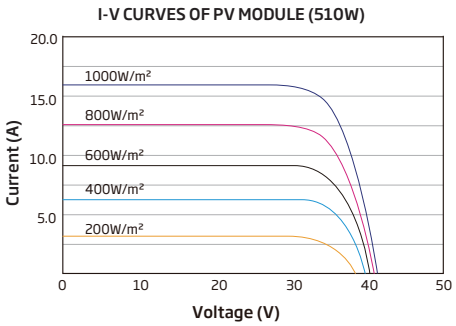

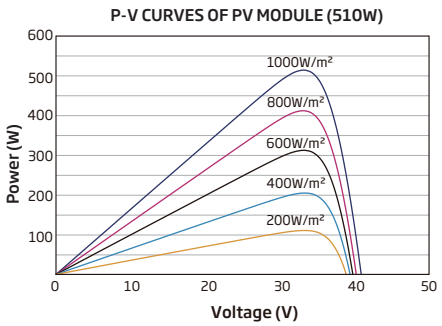

MECHANICAL DATA

Solar Cells	N-type i-TOPCon Monocrystalline
No. of cells	108 cells
Module Dimensions	1961×1134×30 mm (77.20×44.65×1.18 inches)
Weight	23.5 kg (51.8 lb)
Front Glass	1.6mm (0.06inches), AR Coating Heat Strengthened Glass
Back Glass	1.6mm (0.06 inches), Heat Strengthened Glass
Frame	30mm(1.18 inches) Anodized Aluminium Alloy, Black
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm² (0.006 inches²) Length: 1300/1300 mm(51.1/51.1 inches)
Connector	Stäubli Electrical Connectors AG PV-KST4-EVO2/xy_UR; PV-KBT4-EVO2/xy_UR PV-KST4-EVO2A/xy; PV-KBT4-EVO2A/xy
Packaging	Modules per box: 36 pieces Modules per 40' container: 864 pieces

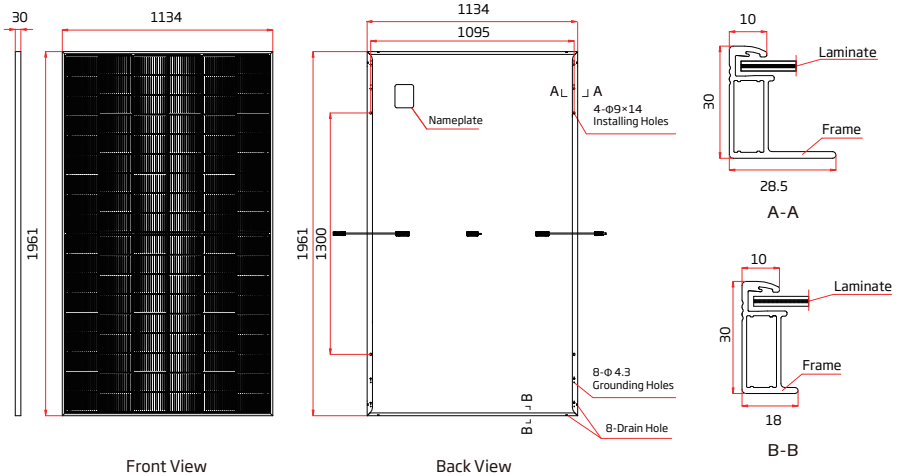

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.
© 2025 Trina Solar Co.,Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.
The right of final interpretation belongs to Trina Solar Co.,Ltd.

Version number: TSM_AUS_EN_2025_D
Country of Origin: China

www.trinasolar.com

Trinasolar