



N-type i-TOPCon Ultra

BACKSHEET MONOCRYSTALLINE MODULE

TSM-NE19R 625-650W

650_W / MAXIMUM POWER OUTPUT

24.1% / MAXIMUM EFFICIENCY



High customer value

- Standardized module size with flagship module power, 30W higher compared with conventional technology
- Low Voltage design with higher string power, effectively reducing BOS (Balance of System) and LCOE (Levelized Cost of Energy) by 1%~5%
- Suitable for all scenario, especially C&I, residential, and ground applications
- Higher container space utilization effectively reduces the freight cost
- Excellent compatibility with existing mainstream system components



High power up to 650W

- Up to 24.1% module efficiency, on 210 innovation platform
- Patented i-TOPCon technology with continuous efficiency improvement, including contact resistance reduction, rear reflection enhancement and edge quality repairment



High reliability

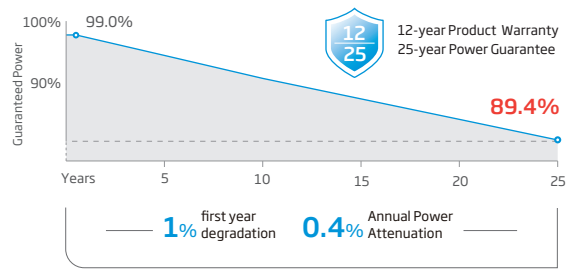
- Minimized micro-cracks with innovative non-destructive cutting technology and high-density packaging
- Reduced risks of hot-spot with half-cut technology
- Certified high resistance against salt, ammonia, sand, PID, LID, LeTID
- Sustainable in harsh environments and extreme weather conditions



High energy yield

- Excellent low irradiation performance, validated by 3rd party
- Lower temperature coefficient (-0.29%/°C)

Performance Warranty



* Please refer to product warranty for details

Comprehensive Products and System Certificates

IEC61215/IEC61730/IEC61701/IEC62716/UL61730

ISO 9001: Quality Management System

ISO 14001: Environmental Management System

ISO14064: Greenhouse Gases Emissions Verification

ISO45001: Occupational Health and Safety Management System



ELECTRICAL DATA (STC)

Peak Power Watts- $P_{MAX}(W_p)^*$	625	630	635	640	645	650
Power Selection (W)**	0 ~ +5					
Maximum Power Voltage- $V_{MPP}(V)$	41.60	42.00	42.30	42.60	42.90	43.20
Maximum Power Current- $I_{MPP}(A)$	15.00	15.01	15.02	15.03	15.04	15.05
Open Circuit Voltage- $V_{oc}(V)$	49.80	50.30	50.50	50.90	51.20	51.50
Short Circuit Current- $I_{sc}(A)$	15.93	15.94	15.95	15.97	15.99	16.01
Module Efficiency η_m (%)	23.1	23.3	23.5	23.7	23.9	24.1

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5. *Measuring tolerance: ±3%. **Power selection up to: +3%.

ELECTRICAL DATA (NOCT)

Peak Power Watts- $P_{MAX}(W_p)$	477	482	487	490	494	498
Maximum Power Voltage- $V_{MPP}(V)$	39.00	39.40	39.80	40.00	40.30	40.60
Maximum Power Current- $I_{MPP}(A)$	12.21	12.23	12.24	12.25	12.26	12.27
Open Circuit Voltage- $V_{oc}(V)$	47.30	47.60	47.90	48.30	48.60	48.80
Short Circuit Current- $I_{sc}(A)$	12.84	12.85	12.86	12.87	12.89	12.91

NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

TEMPERATURE RATINGS

NOCT (Nominal Operating Cell Temperature) 43°C (±2°C)

Temperature Coefficient of P_{MAX} -0.29% /°C

Temperature Coefficient of V_{oc} -0.24% /°C

Temperature Coefficient of I_{sc} 0.04% /°C

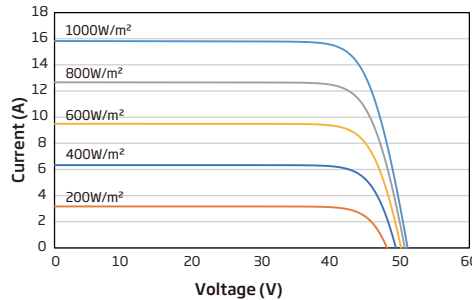
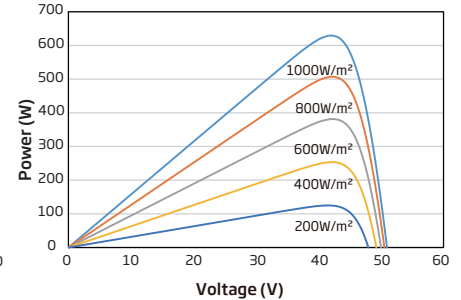
Due to different testing methods, the actual performances might differ from the declared specifications.

APPLICATION CONDITIONS

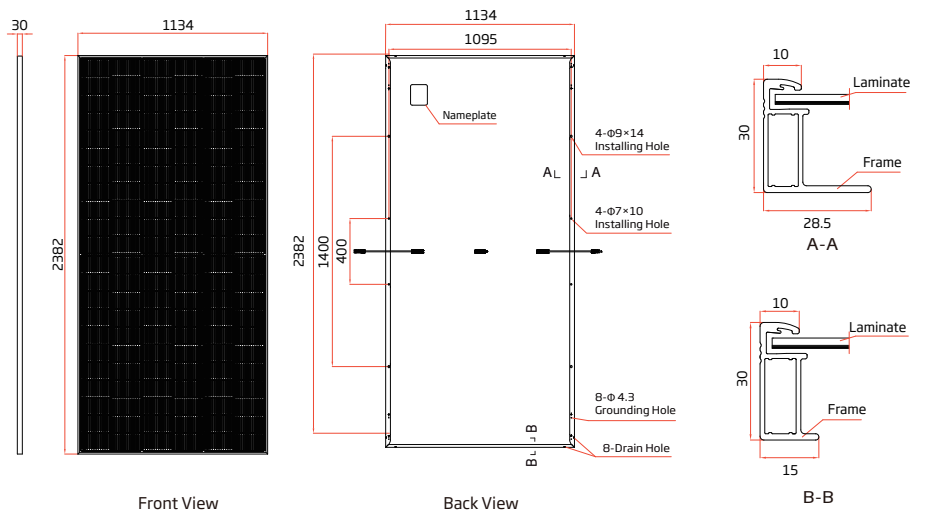
Operating Temperature -40~+70°C

Maximum System Voltage 1500V DC (IEC)

Max Series Fuse Rating 30A

CURVES OF PV MODULE
I-V CURVES OF PV MODULE (630W)

P-V CURVES OF PV MODULE (630W)

MECHANICAL DATA

Solar Cells	N-type i-TOPCon Monocrystalline
No. of cells	132 cells
Module Dimensions	2382×1134×30 mm (93.78×44.65×1.18 inches)
Weight	27.9 kg (61.51 lb)
Front Glass	3.2mm (0.13inches), AR Coating Tempered Glass
Backsheet	White
Frame	30mm(1.18 inches) Anodized Aluminium Alloy
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm ² (0.006 inches ²) Portrait:200/320 mm(7.87/12.60inches) Length can be customized
Connector	TS4/ TS4 Plus
Packaging	Modules per box: 36 pieces Modules per 40' container: 720 pieces



www.trinasolar.com

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.
© 2025 Trina Solar Co.,Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.
The right of final interpretation belongs to Trina Solar Co.,Ltd.
Version number: TSM_APAC_EN_2025_C