


N-type i-TOPCon Ultra

MONOFACIAL DUAL GLASS MODULE

TSM-NEG18R.28Q 510-535W

535_W / MAXIMUM POWER OUTPUT

24.1% / MAXIMUM EFFICIENCY

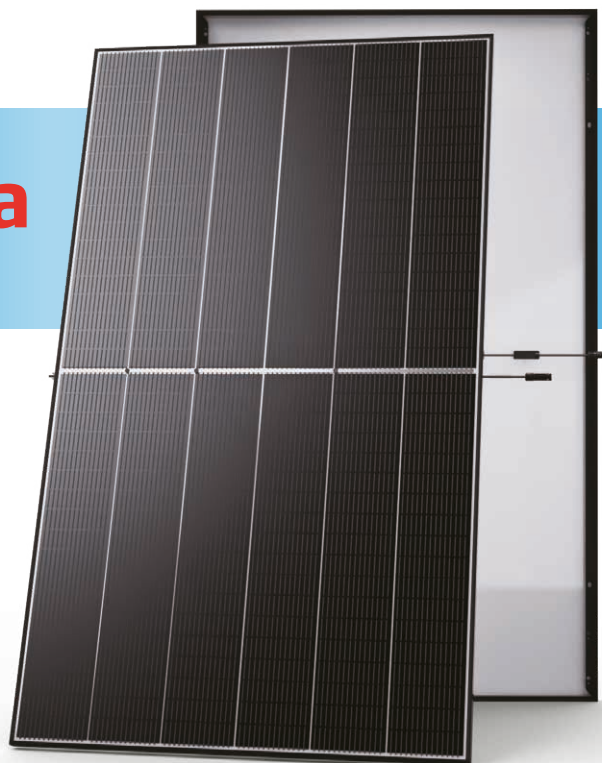

High customer value

- Lower LCOE (levelized cost of energy), reduced BOS (balance of system) cost, shorter payback time
- Designed for compatibility with existing mainstream system components
- High module power, high string power and low voltage design
- Easy to handle and install on roofs with excellent size and light weight



High power up to 535W

- Up to 24.1% module efficiency, on T10 innovation platform
- Patented i-TOPCon technology with continuous efficiency improvement, including contact resistance reduction, rear reflection enhancement and edge quality repairment



Dual-glass design, high reliability


- Less prone to micro-cracks and scratches on the back side
- Applicable in harsh environments such as salt, ammonia, sand, high temperature and high humidity areas with excellent fire rating, weather resistance, salt spray, sand dust, ammonia performance
- Mechanical performance up to 5400 Pa positive load and 2400 Pa negative load



High energy yield

- Excellent low irradiation performance, validated by 3rd party
- Lower temperature coefficient (-0.26%/°C) and operating temperature

Performance Warranty

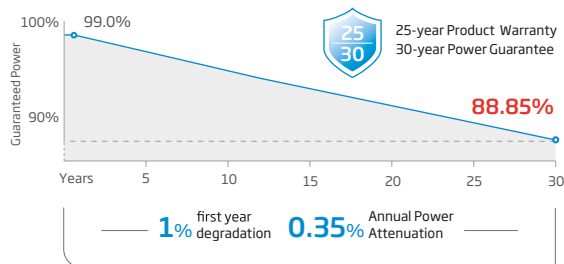

* Please refer to product warranty for details

Comprehensive Products and System Certificates

- ISO 9001: Quality Management System
- ISO 14001: Environmental Management System
- ISO14064: Greenhouse Gases Emissions Verification
- ISO45001: Occupational Health and Safety Management System



ELECTRICAL DATA (STC)

Peak Power Watts- $P_{MAX}(W_p)^*$	510	515	520	525	530	535
Power Selection (W)**	0 ~ +5					
Maximum Power Voltage- V_{MPP} (V)	33.70	33.90	34.10	34.30	34.50	34.70
Maximum Power Current- I_{MPP} (A)	15.14	15.20	15.25	15.31	15.36	15.42
Open Circuit Voltage- V_{oc} (V)	40.60	40.90	41.20	41.60	41.80	42.10
Short Circuit Current- I_{sc} (A)	15.93	15.96	15.99	16.02	16.05	16.08
Module Efficiency η_m (%)	22.9	23.2	23.4	23.6	23.8	24.1

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5. *Measuring tolerance: $\pm 3\%$. **Power selection up to: +3%.

ELECTRICAL DATA (NOCT)

Peak Power Watts- $P_{MAX}(W_p)$	391	395	399	403	407	411
Maximum Power Voltage- V_{MPP} (V)	32.10	32.40	32.60	32.90	33.10	33.40
Maximum Power Current- I_{MPP} (A)	12.17	12.20	12.22	12.24	12.27	12.30
Open Circuit Voltage- V_{oc} (V)	38.70	39.00	39.30	39.60	39.80	40.10
Short Circuit Current- I_{sc} (A)	12.84	12.86	12.89	12.91	12.94	12.96

NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

TEMPERATURE RATINGS

NOCT (Nominal Operating Cell Temperature) 43°C ($\pm 2^\circ\text{C}$)

Temperature Coefficient of P_{MAX} -0.26% / °C

Temperature Coefficient of V_{oc} -0.24% / °C

Temperature Coefficient of I_{sc} 0.04% / °C

Due to different testing methods, the actual performances might differ from the declared specifications.

APPLICATION CONDITIONS

Operating Temperature -40~+70°C


Maximum System Voltage 1500V DC (IEC)

Max Series Fuse Rating 30A


CURVES OF PV MODULE

Preliminary

I-V CURVES OF PV MODULE (520W)

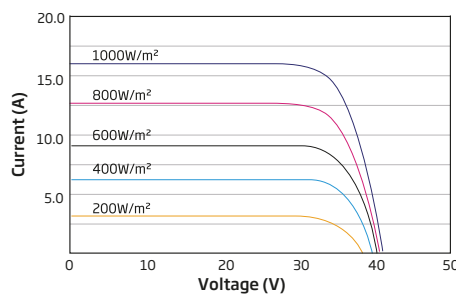


P-V CURVES OF PV MODULE (520W)

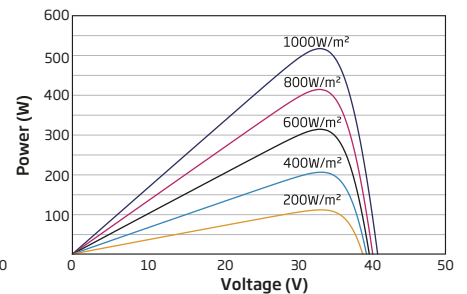

MECHANICAL DATA

Solar Cells	N-type i-TOPCon Monocrystalline
No. of cells	216 cells
Module Dimensions	1961×1134×30 mm (77.20×44.65×1.18 inches)
Weight	23.5 kg (51.8 lb)
Front Glass	1.6mm (0.06inches), AR Coating Heat Strengthened Glass
Back Glass	1.6mm (0.06inches), Heat Strengthened Glass
Frame	30mm(1.18inches) Anodized Aluminium Alloy, Black
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm ² (0.006inches ²) Portrait: 200/510 mm (7.87/20.08inches) Length can be customized
Connector	TS4 Plus / TS4 / MC4 EV02 *
Packaging	Modules per box: 36 pieces Modules per 40' container: 864 pieces

*The connector names listed are general names; specific types are subject to the certification documents.

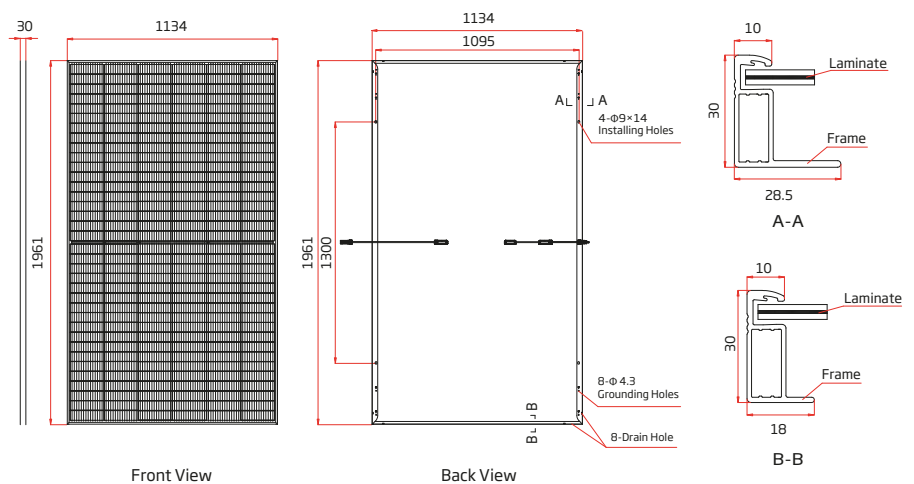

www.trinasolar.com

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.
© 2026 Trina Solar Co., Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.
The right of final interpretation belongs to Trina Solar Co., Ltd.
Version number: TSM_EN_2026_PA2